
WALL BUSHING

L Z Ш

The safest way of wall and ceiling bushing. Ideally for all wooden houses



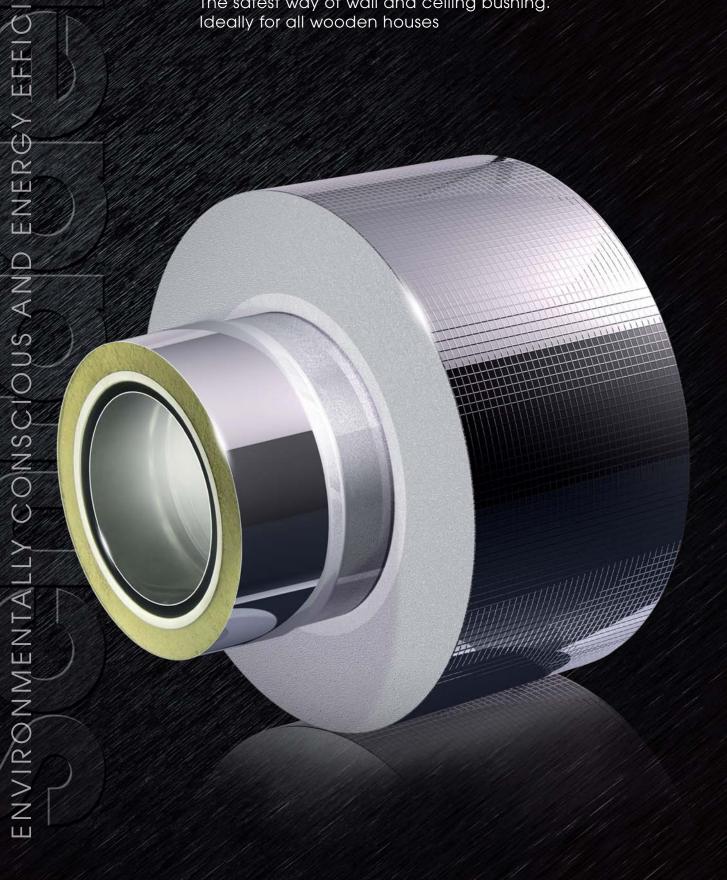

The round wall bushing with highest safety made by Schräder. Ideally for all wooden.

Houses constructed out of wood are enjoying a growing popularity. Of course you need to pay increased attention to fire protection regulations. This applies primarily if a heating system or an oven will be installed and the waste gas pipe has to pass through inflammable materials. For this kind of installation Schräder has developed a new wall, ceiling and roof bushing that provides maximum safety.

This new wall, ceiling and roof bushing is equipped with a newly developed glass fiber insulant that has a several times higher insulation efficiency, than for example conventional insulating materials such as mineral wool. This special composition allows that the outside of the bushing can have direkt contact to inflammable materials.

For installation a hole has to be cut into the wooden wall. Then the bushing will be inserted and fastened. The bushing will be covered by a front plate made of Vermiculit which serves as heat protection and radiation blind. A stainless steel blind on the other side of the wall completely encloses the waste gas pipe and gives it a tidy finish.

This bushing made by Schräder is available for nominal diameter 130 to 250mm and a wall thickness (horizontal installation) of 120, 240 and 360mm. For the installation as ceiling or roof bushing (vertical installation) it is also available in a length of 1000mm which than has to be shortened on site. The maximum length in the horizontal installation is 360mm and the vertical installation 500mm.

This bushing is accredited by the "Deutsches Institut für Bautechnik" and has the homologation no. Z-7.4-3408. It therefore offers certified safety.

r
SIE

Hemsack 11-13 59174 Kamen Tel.: +49 (0)23 07 / 9 73 00-0 Fax: +49 (0)23 07 / 9 73 00-55

Fax: +49 (0)23 07 / 9 73 0 www.schraeder.com kamen@schraeder.com Neue Siedlung 1 04509 Schönwölkau OT Badrina

Tel.: +49 (0)3 42 08 / 7 41-0 Fax: +49 (0)3 42 08 / 7 41-19 badrina@schraeder.com

	outside Ø mm øA wall bushing Ø mm øB		190 360	210 380	220 390	240 410	260 430	310 480
wall thickness in mm	80 YO = 09 + NO	incl. 1x VERMICULIT® front plate	123,-	129,-	146,-	157,-	168,-	225,-
	240		190,-	202,-	213,-	224,-	235,-	300,-
	360		258,-	280,-	291,-	314,-	336,-	395,-
	1000mm – can be shortened (only verical installation - max. lenght 500mm)	incl. 2x VERMICULIT® front plate	570,-	600,-	630,-	690,-	750,-	930,-

